


CHÂSSIS EN PARTIES



CHASSIS DÉMONTABLE EN 3 PARTIES


Dans un premier temps unir les parties de la cage entre-elles. Venir positionner l'ensemble sur la partie centrale (sellette-moteur) puis unir les différents points d'encrage en allant du haut vers le bas. Fixer les clips plastiques et a continuation on joint les deux parties inferieur du châssis et on les fixes avec les clips du pied et le superieur du châssis.

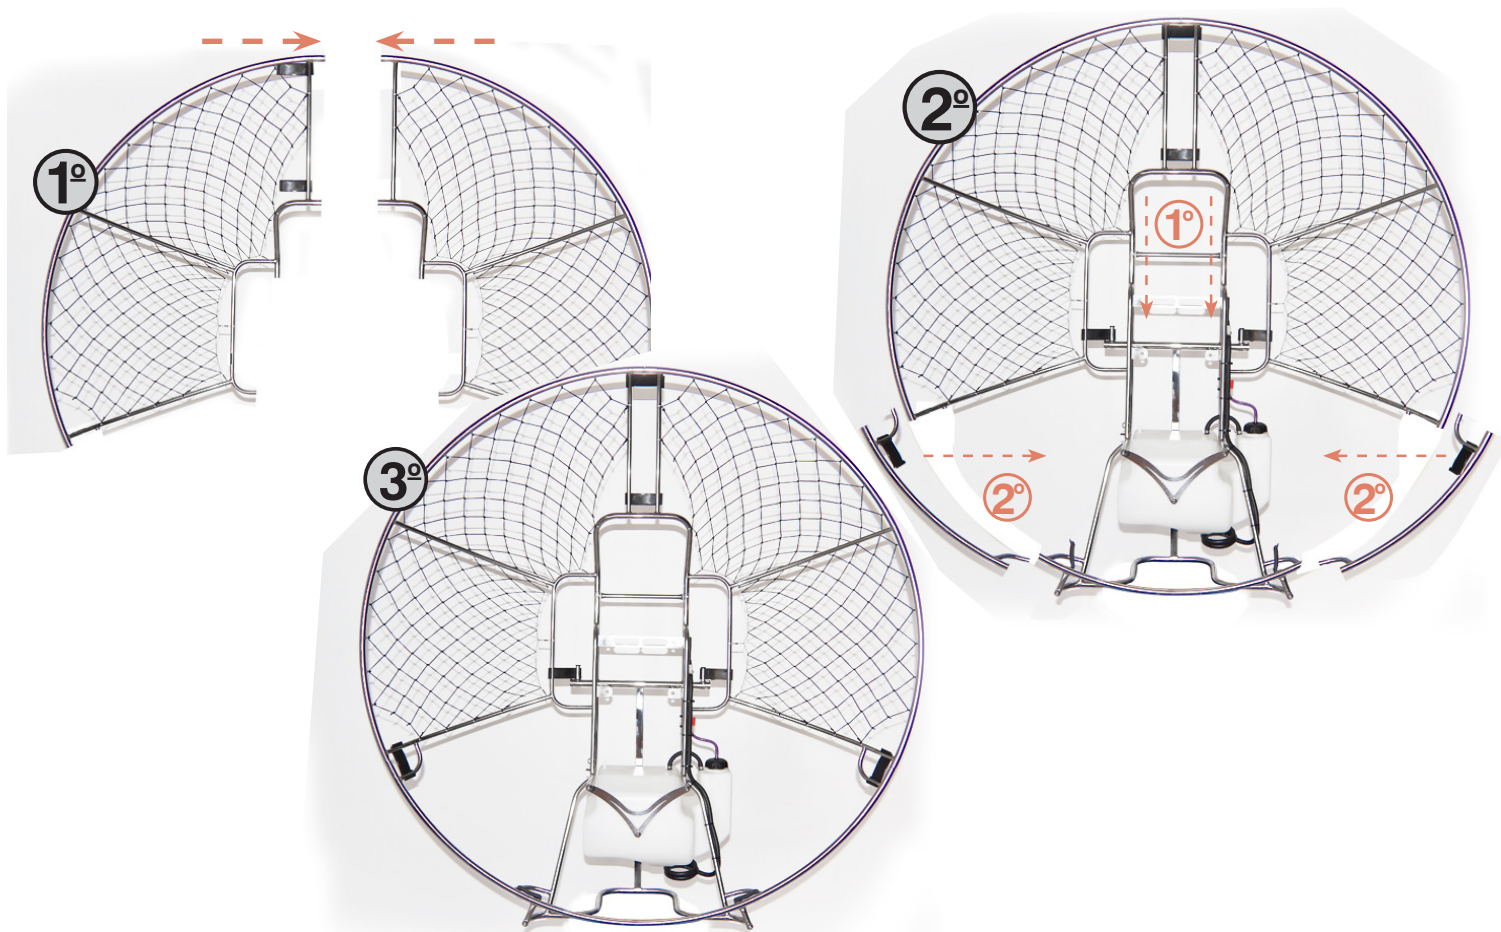


CHASSIS DÉMONTABLE EN 4 PARTIES

Dans un premier temps unir les parties de la cage entre-elles. Venir positionner l'ensemble sur la partie centrale (sellette-moteur) puis unir les différents points d'encrage en allant du haut vers le bas.

Fixer les clips plastiques et a continuation on joint les deux parties inferieur du châssis et on les fixes avec les clips du pied et le superieur du châssis.

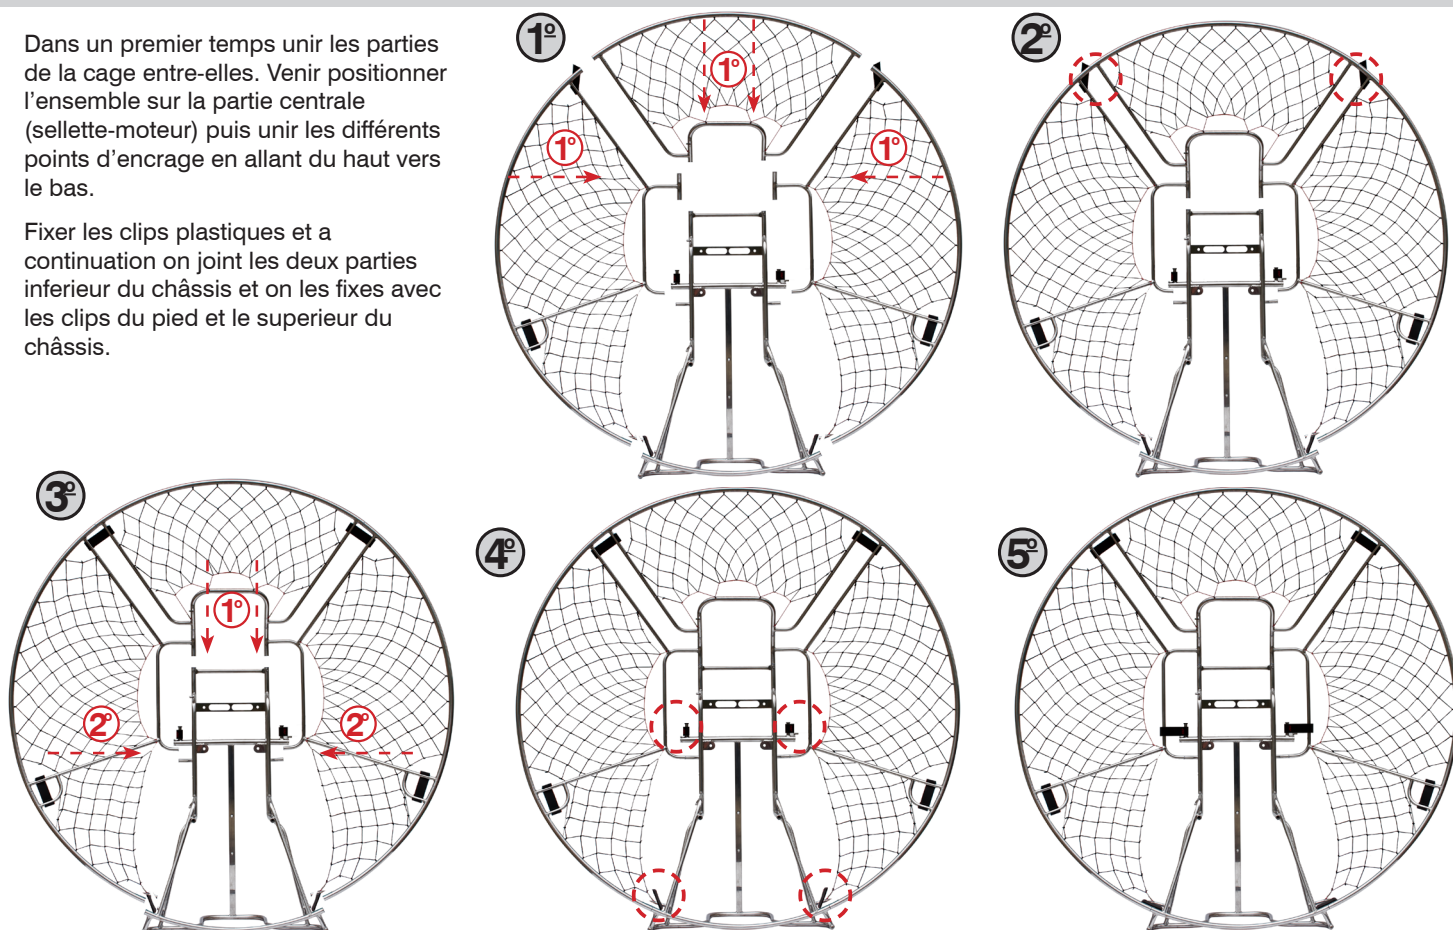

**ASSEMBLY OF THE LOWER FRAME BARS
JOINED BY THE NET IN THE 2014 MODEL FRAME**

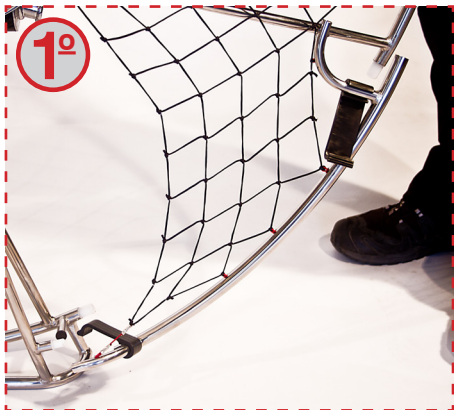

Before starting the assembly. We have to ensure that the position of the bar, joined by the net, it is as shown in the image.



First we join the bar to the frame's base, exerting slight pressure in the way of the arrow's direction. For helping the pressure in the adequate direction, you should help yourself with the thumb in the external tube as it shows the detailed picture.



Fix the clip which joins the frame bar to the frame's base.



To join the lower bar to the top part of the frame, disjoin progressively the bar from the top exerting slight force in the way of the arrow's direction.


The aim is to reach the needed separation, so the pins of union can introduce in the inside of the tubes.



You can sustain the pins in the edges and exert a slight pressure towards the inside with your hand's palm, so it finishes to introduce the pins into the tubes.




Fix the external clip of the bar.

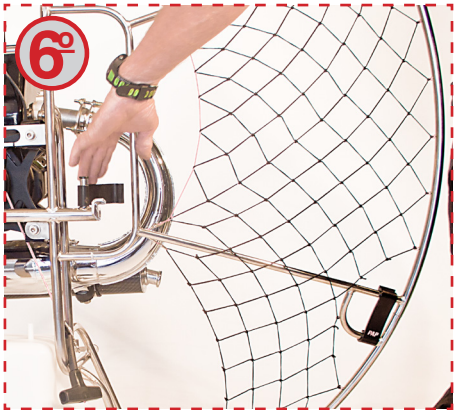


Fix the joining clip to the frame's base.


**REMOVAL OF THE LOWER FRAME BARS
JOINED BY THE NET IN THE 2014 MODEL FRAME**

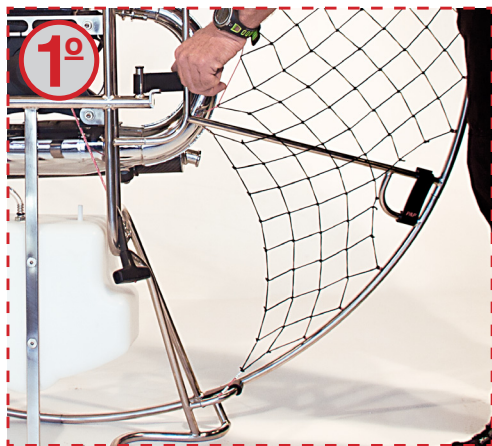

Remove the binding clip from the frame.

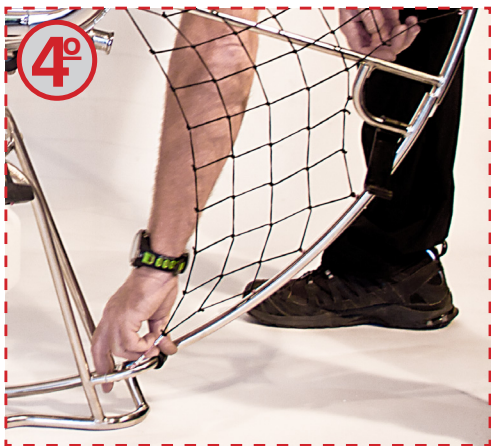


Remove the clip, which joins the frame bar to the frame base.

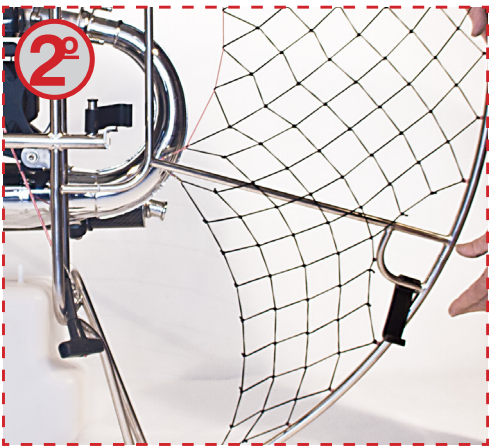

Remove the external binding clip.



With the aim of finishing the bar detachment, pull slightly in the way of the arrow's direction.

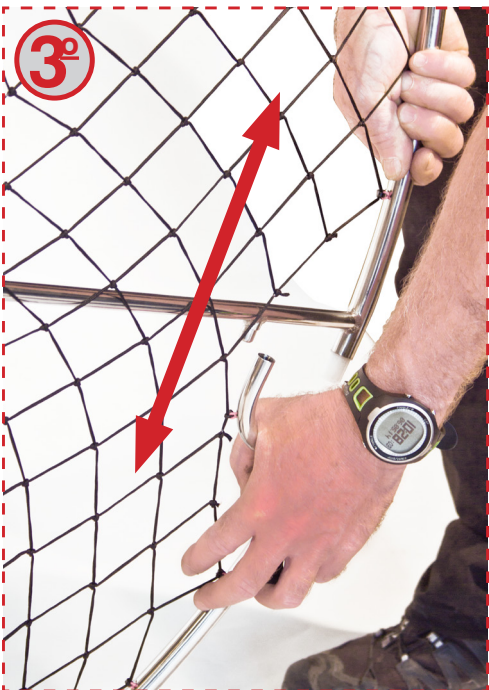

With the aim of disjoin the lower frame bar. Hold the bar, as the image shows and pull the frame slightly in the way of the arrows's direction.



The bar is now fully detached, joined by the net to the top frame part.